

OSN1224M

1.2 GHz Segmentable Optical node 2x2, 4 active outputs




FORWARD PARAMETERS	
Wavelength	1260 - 1620 nm
Bandwidth	85...258 - 1218 MHz
Optical input power range	- 9.9 - 2 dBm
Nominal optical input range	- 5 to +1 dBm
Flatness ¹	± 0.75 dB
Equivalent Input Noise Current ²	5 pA / √Hz
Output level: ³	
CTB ≤ -60 dBc	4 x 116 dB μV
CSO ≤ -60 dBc	4 x 117 dB μV
Umax ⁴	4 x 112 dB μV
Gain limited output level ⁵	4 x 117 dB μV
Number of outputs	4 active
RETURN PARAMETERS	
Bandwidth	5 - 65 ... 204 MHz
Flatness ⁶	± 0.75 dB
Optical output power ⁷	3 or 6 dBm ± 0.5 dB
Min RF input level to get 10% OMI ⁸	70 dB μV
NPR / Dynamic range ⁹	40 dB / 5 dB
OTHERS	
Return loss ¹⁰	> 16 dB
Port to Port Isolation	> 60 dB
AC voltage range: remote powering	35 - 90 V AC
Max. current for RF / AC IN ports	15 / 25 A
Power consumption ¹¹	< 60 W
Operation temperature range	- 40 - 65 °C
Optical connectors	SC / APC
RF connectors	4 x PG11
Protection class	IP 67
Dimensions (W x L x H)	340 x 210 x 185 mm
Weight	< 7.0 kg
AVAILABLE VERSIONS	
OSN1224M-60	remote powering; max. config: 2Rx x 2Tx

- In range 85 - 600 MHz; ± 0.75 dB in range 600 - 1006 MHz; ± 1.0 dB in range 1006 - 1218 MHz
- Typical value; the worst case 6 pA / √Hz
- According to EN 50083-3, 9 dB slope between 85 to 862 MHz, 42 channels CENELEC, typ. value
- Full digital load 258 - 1218 MHz, 110 channels QAM 256, 12 dB slope
- 3.25% OMI, 0dBm optical input level, 1310 nm
- Up to 85 MHz; ± 0.75 dB up to 204 MHz
- For CWDM lasers, up to 16 wavelengths are available in 3 dBm version and 8 wavelengths are available in 6 dB version
- With AT3, AT4, AT5, AT6 = 0dB regardless of US configuration
- Measured with 12 dB link (15 km fiber + loss), 60 MHz BW noise load, EINC 7pA / √Hz
- In 5 - 65 MHz; 18 dB for f < 40 MHz; 18 dB -1.5 dB / oct for f > 40 MHz, but > 11 dB
- 60 V AC; Configuration: 2x FWD Rx, 2x 3 dBm CWDM lasers

Unless otherwise specified, the whole specifications are tested with 65 / 85 duplex filters installed; at room temperature 25°C and present typical values.

Note: Specifications are subject to change without notice.

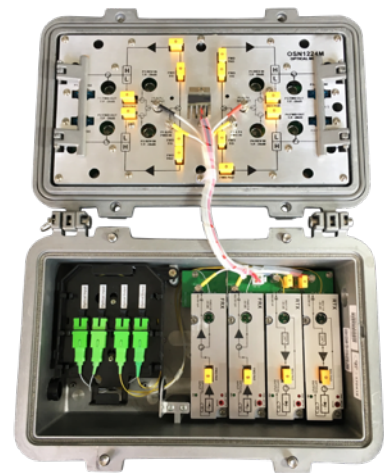

1.2 GHz technology

An extended bandwidth in downstream up to 1.2 GHz; DOCSIS 3.1 standard compliant

200 MHz technology

A possibility of extending bandwidth in upstream up to 200 MHz

GaN Technology

The Output parameters for analog and digital carriers improved for lower power consumption

Supports CWDM, DWDM

Multiwavelength technologies

The same accessories

Both equalizer and attenuator are built by fixed attenuator in order to manage accessories expediently.

RF amplifier part modular design

RF amplifier part adopts quick plug modular design, can quickly replace RF amplifier module without dismantling the RF cable connector.

RX and TX part modular design


RX and TX part adopts quick plug modular design, easy to repair replacement

GREEN mode

A significant reduction of power use thanks to optimization of its consumption

Block Diagrams

SEGMENT MODE

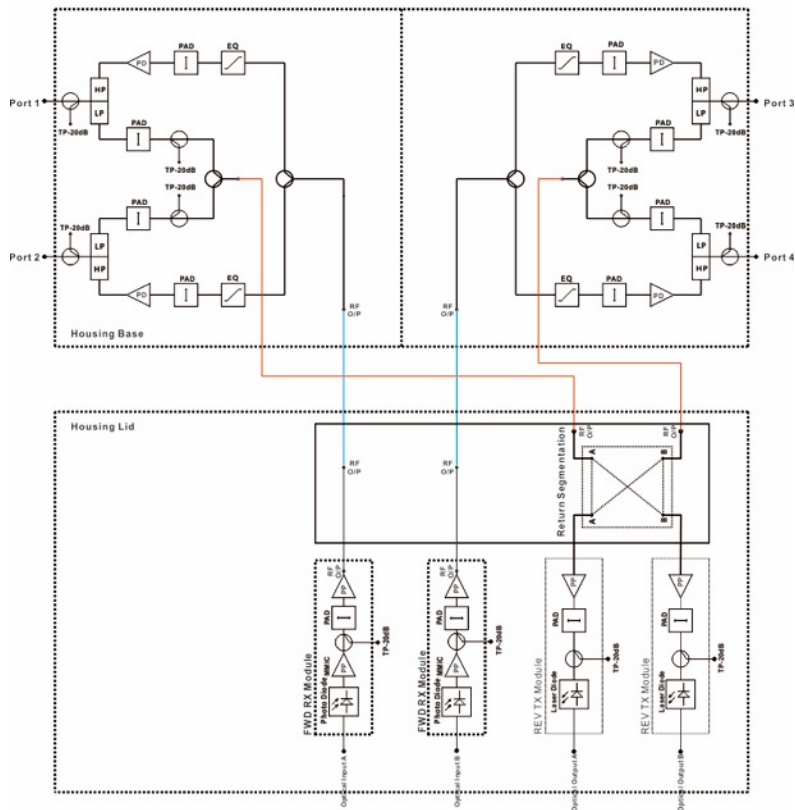

REDUNDANCE MODE

